

CHINA

CE,ISO, SGS

laminated glass

USD1-99/

7 days

D/A

wooden case

20000 Square Meter/Day

Rise

# **Transparent Flat Laminated Safety Glass for** Windows/Fence

T/T, L/C, D/P, Western Union, MoneyGram,

青島建設設

料技費開公司

## **Basic Information**

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity: 1 container
- Price:
- · Packaging Details:
- Delivery Time:
- Payment Terms:
- Supply Ability:



#### **Product Specification**

<ul> <li>Hole Drilling:</li> </ul>	Available	
Lamination:	Available	
• Package:	Wooden Crate	
Printing:	Available	
<ul> <li>Product Name:</li> </ul>	Tempered Over Laminated Glass	
Safety:	High Safety	
• Shape:	Flat	
Structure:	Solid	
• Usage:	Furniture, Building, Window	
Certificate:	CE, ISO, SGS	
• HS Code:	7007290000	
Specification:	1702mm-2800mm	


• Highlight:



Fence Flat Laminated Safety Glass, Windows Flat Laminated Safety Glass, **Transparent Flat Laminated Safety Glass** 

#### More Images






for more products please visit us on rise-glass.com

### Basic Info.

Layer Type		Common Laminated Glass	Details:
Function		Decorative	Delans.
Intermediat	e Film	PVB	
Melting Poi	nt	High Temperature	
Production		Dry Laminated Glass	
		-	
Color		Clear	
Usage		Furniture, Building, Window	
Delivery Tir	ne	15-20 Days	
HS		7005100000	
PVB Color		Blue, Green, Gray, Bronze and Milk White,	
PVB Thickr	ness	0.38mm, 0.76mm, 1.14mm, 1.52mm etc	
Edge Work		Flat Polished	
Quality Sta	ndard	GB 15763.3-2009	
Layers		Multi Layers Upon Your Request	
PVB Brand		Decent, Saflex, Sentryglas	
Application		Architecture, Furniture	
Interlayers		PVB/EVA/Sgp/PU/Sgx/Xir	
Thickness		5.38mm6.38mm/6.76mm/8.38	
THICKNESS		mm/8.76mm/10.38mm/10.76m m/	
Size		According to The Client' S Requirement	
Technique		Laminated	
Payment		T/T	
Certificate		CE,ISO, SGS	
Transport F	Package	Wooden Case	
Specificatio	-	1702 mm-2800 mm	
Trademark		Rise	
Origin		China	
-			
HS Code		7007290000	
Production		20000 Square Meter/Day	
Thickness	8.76mm,10.76mm,12.	8mm,12.38mm,16.38mm,6.76mm, 76mm,16.76mm,20.76mm,24.76mm.	
Film type	PVB-Film		
Thickness of PVB	0.38mm (.015"), 0.76n (.090")	nm (.030"), 1.14mm (.045"), 1.52mm	(.060"), 2.28mm
Interlayer	according to your requirements		
Color	High Transparent, milky, blue, dark grey, light green, bronze, etc.		
Size	Customized		
Origin	Qingdao,China		
Packing	Strong wood cases		
Production Capacity	2000000		
Delivery Time	10 days		
Usage	Building		
Brand	Rise		

Laminated glass: a strong and protective glass composed of two or more layers bonded together with a resilient interlayer. It remains intact upon impact, reducing the risk of shattered glass. Laminated glass provides enhanced safety, security, sound insulation, and UV protection, making it ideal for various architectural, automotive, and safety applications.

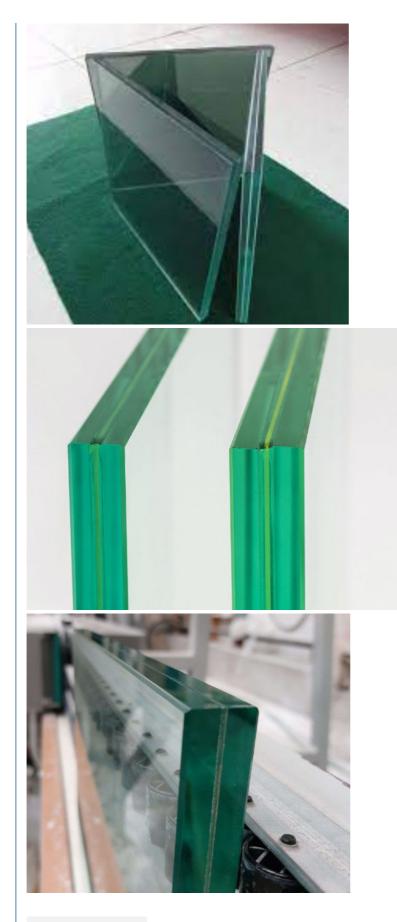

## Packaging &

Shipping

Laminated Tempered Glass 6.38/10.38/16/12 /13.52 mm Low Iron Polished Edge Tempered Laminated Glass

After Sales

Service

