


Clear Laminated Glass Float Glass PVB High Safety 4.38mm - 25.52mm

Our Product Introduction


Basic Information

- Place of Origin: China
- Brand Name: Rise
- Certification: CE, ISO, SGS
- Model Number: L-008
- Minimum Order Quantity: 20ft FCL
- Price: 5-16USD/SQM
- Packaging Details: Wooden Crates Worthy for Ocean and Land Carriage .
- Delivery Time: 5-15 work days
- Payment Terms: D/P, T/T, Western Union, MoneyGram
- Supply Ability: 80000 SQM/DAY

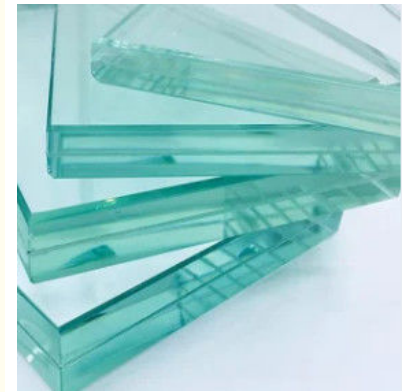


Product Specification

- Surface Treatment: Frosted, Acid Etched, Etc.
- Impact Resistance: 5 Times Stronger Than Annealed Glass
- Safety Features: Breaks Into Small, Blunt Pieces When Shattered
- Edge Processing: Flat, Polished, Beveled, Chamfered, OG, Etc.
- Shape: Flat, Curved, Bent, Etc.
- Product Feature: Safety, Various Colors
- Warranty: 10 Years
- Interlayer: PVB, SGP, EVA
- Hole: Round, Oblong, Etc.
- Fire Resistance: Can Withstand High Temperatures For A Certain Period Of Time
- Pvb Color: As Request
- Edge Work: Polished, Beveled, Etc.
- Size: Customized

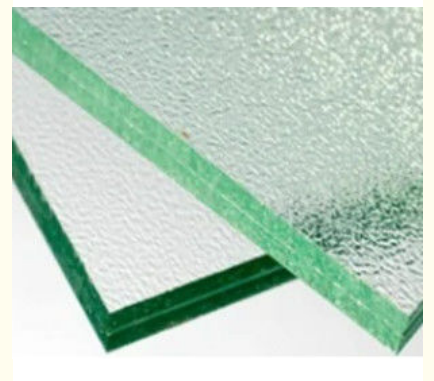

More Images



for more products please visit us on rise-glass.com

Product Description

Clear Laminated Glass

GLASS THICKNESS

Nominal Glass Thickness :

6.38 mm to 16.38 mm Float Laminated glass


8.76 mm to 24.76 mm Toughened Laminated glass

Max size:3680*2800mm

other specifications and sizes can be customized according to customers' requirements.

GLASS COLORS

Clear

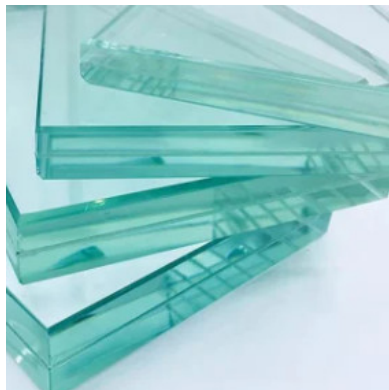

Product Details

GLASS DESCRIPTION

Two or three layers of clear float glass "sandwiched" together with clear or colored PVB interlayer, laminated glass is the one glass that reconciles the aesthetic benefits of glass with a genuine concern for safety;

offering superior protection against glass breakage, as well as harmful solar rays and hazardous noise levels.

Due to the adhesive properties of the PVB, Rider takes careful precautions to prevent unwanted particles from attaching to the PVB during the adhesion process.

GLASS THICKNESS DETAILS

3+0.38pvb+3mm; 4+0.38pvb+3mm;

5+0.38pvb+5mm; 6+0.38pvb+6mm;

3+0.76pvb+4mm; 4+0.76pvb+4mm;

5+0.76pvb+5mm; 6+0.76pvb+6mm etc.

PVB COLORS

- Milky White

- French Green

- Light Blue

- Bronze

- Light Grey

- Dark Grey

- Ocean Blue etc.

PVB THICKNESS

0.38mm, 0.76mm, 1.14mm, 1.52mm etc.

HOT SIZE

1830*2440, 3300*2140/2440, 3660*2140/2440mm etc.

QUALITY CERTIFICATION

AS/NZS 2208:1996; EN 14449:2006; EN ISO 12543:012 etc.

BENEFITS

Holds together when shattered. The PVB interlayer keeps the glass bonded, even when broken, resulting in a characteristic spider web cracking pattern across the glass.

Cyclone resistant

Superior UV blockage

Excellent sound damping properties

Low visible distortion

APPLICATIONS

External use of windows, doors, shopfronts in offices, houses, shops etc.

Interior glass screens, partitions, balustrades etc.

Shop display windows, showcases, display shelves etc.

Furniture, table-tops, picture frames etc.

RiSE Qingdao Rise Glass Technology Co., Ltd

 15215322121

 leon@qdcrglass.com

 rise-glass.com

Tianzhi Building, No. 63 Beijing Road, Huangdao District, Qingdao City, Shandong Province