



Qingdao Rise Glass Technology Co., Ltd
rise-glass.com

Rise
QINGDAO RISE GLASS TECHNOLOGY CO., LTD


Quality conquers the world, Service achieves the future

6.38mm-17.52mm Factory Price Laminated Glass for Windows and Buildings

Our Product Introduction


Basic Information

- Place of Origin: China,qingdao
- Brand Name: Rise Glass
- Certification: CE CSI SGCC
- Model Number: L-01
- Minimum Order Quantity: 5 Crate
- Price: 4USD/SQM
- Packaging Details: Wooden Crates Worthy for Ocean and Land Carriage
- Delivery Time: 15 Days
- Payment Terms: payment By T/T at sight.
- Supply Ability: 8000SQM/DAY


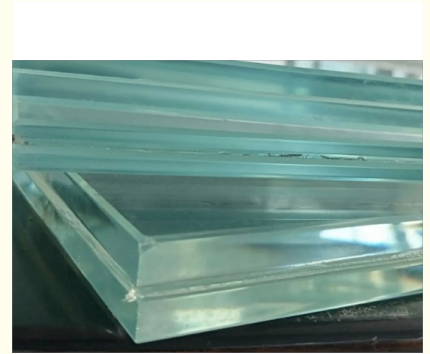


Product Specification

- Interlayer: PVB, SGP, EVA
- Type: Laminated
- Application: Building, Automotive, Etc.
- Impact Resistance: 5 Times Stronger Than Annealed Glass
- Sound Insulation: Reduces Noise Transmission By Up To 80%
- Durability: Long-lasting
- Interlayer Thickness: 0.38mm-2.28mm
- Notch: C, U, Etc.
- Color: Clear, Ultra Clear, Bronze, Grey, Green, Blue, Etc.
- Customizable Design: Can Be Customized With Patterns Or Logos
- Function: Safety
- Maintenance: Low Maintenance

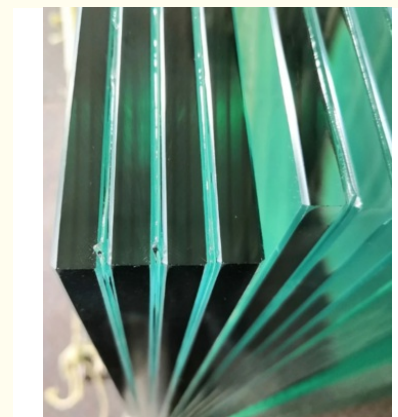

More Images



for more products please visit us on rise-glass.com

Product Description

Product Description:

- 1) Laminated glass, also called multi-layered glass
- 2) Made of high quality common glass of various specification or be structured With such glass as laminated, tempered, coated and low-E coating glass, creating A better effectiveness of it
- 3) It has a lower U value 25W electricity will be saved by using one square meter of it
- 4) A better sound proof will be achieved when the glass is used, reducing noise of about 30dB
- 5) Laminated glass possesses a great deal of advantages such as energy saving, soundproof, safety and condensation proof
- 6) Widely used in building industry, train and ship

Laminated Glass is a type of safety glass that holds together when shattered. In the event of breaking, it is held in place by an interlayer, typically of polyvinyl butyral (PVB), between its two or more layers of glass. The interlayer keeps the layers of glass bonded even when broken, and its high strength prevents the glass from breaking up into large sharp pieces. This produces a characteristic "spider web" cracking pattern when the impact is not enough to completely pierce the glass.

PVB Colors:

1. Milky White
2. French Green
3. Light Blue
4. Bronze
5. Light Grey
6. Dark Grey
7. Ocean Blue etc.

Various colors as per clients request

Laminated Glass Benefits:

Avoids potential cuts and injuries as a result of broken glass (for example used in doors, table tops, shower screens etc).

Laminated glass: assembled using a single plastic film.

Basic protection

Provides protection against the risk of injuries due to accidental breakage (for example windows or patio doors)

Laminated glass: assembled using two or more plastic films. enhanced protection

Provides protection against a change in level and objects falling on to or penetrating the glass.

The pieces of glass stay in place, stuck to the plastic interlayers, until a replacement arrives. Safety glass for safe breakage or overhead glazing can be combined with other glass functions for additional comfort: security, thermal insulation, acoustic insulation, low-maintenance and decorative glass.

Although tempered glass is considered as a kind of safety glass, when it is used at high altitude, the "particle rain" formed by the falling debris after its destruction will cause a certain degree of damage to the human body. Therefore, the advantages of laminated glass are greater than tempered glass when it is used at high altitude, and it is widely used in building curtain walls, doors and windows, canopies, awnings, indoor partitions, etc.

Applications:

- A) External use of windows, doors, shopfronts in offices, houses, shops etc.
- B) Interior glass screens, partitions, balustrades etc.
- C) Shop display windows, showcases, display shelves etc.
- D) Furniture, table-tops, picture frames etc.

Customization:

Brand	Teckson Glass
Name	Laminated Glass
Thickness	5.38mm/6.38mm/6.76mm/8.38mm/8.76mm/10.38mm/10.76mm/12.38mm/12.76mm etc
PVB thickness:	0.38mm, 0.76mm, 1.14mm, 1.52mm etc.
PVB color	Blue, Green, Gray, Bronze and Milk white, etc.
Normal Sizes(mm)	1830x2440mm, 2134x3300mm, 2440x3660 or according to the client's requirement
Quality Standard	CE, SGS,ISO
Application	architecture, furniture
MOQ	1*20 FCL
Package	Wooden Crates or Plywood Cartons

Qingdao Rise Glass Technology Co., Ltd

 13375551365
  leon@qdcrglass.com
 rise-glass.com

Tianzhi Building, No. 63 Beijing Road, Huangdao District, Qingdao City, Shandong Province